PACKAGING MATERIAL SPECIFICATION

SPEC. NO.: CA-123 **DATE:** XX/XX/XX **PAGE:** 1 of 2

PACKAGE CONFIGURATION Cans must be delivered on trays, packed 50 per layer with 6 layers high (350 total).

SPEC NOTES:

1) This package material may be part of a United Nations performance tested assembly (POP) for hazardous materials. Any deviation from this packaging specification is strictly prohibited without written revision from PPG Aerospace
2) The can must be capable of passing an internal pressure test of 95 kPa for 5 minutes when coupled with a plastic overseal
3) The Provisions of this specification shall be the basis for acceptance or rejection of this item

APPROVED SUPPLIERS:	MANUFACTURER & PART #:	SUPPLIER:	SUPPLIER PART #:	APPROVAL DATE:
Primary	Company XYZ	TEN-E Packaging	CA-123	XX/XX/XX
Alternate #1				
Alternate #2				
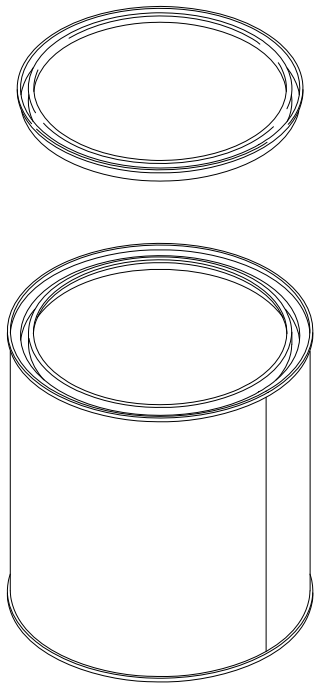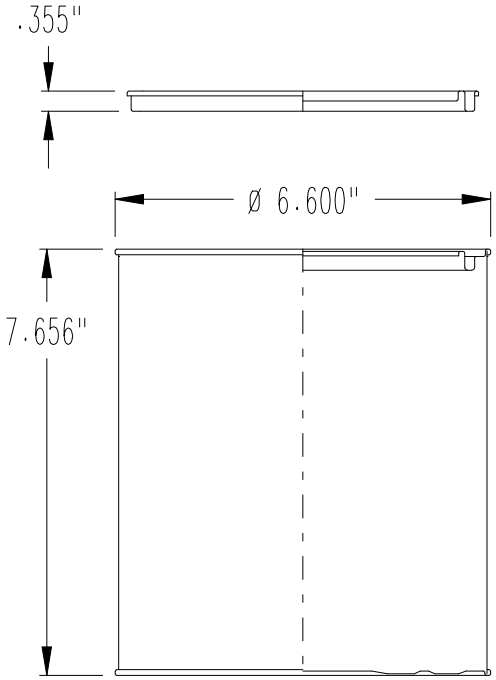
COMPONENT DRAWINGS